

**JC853 U.S. PTO**

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington D.C. 20231  
Box Patent Applications

Case Docket No. FUJG 17.913  
Filed by Express Mail  
(Receipt No. EL522395082US)  
on October 26, 2000  
pursuant to 37 CFR 1.10  
by Lydia Gonzalez

**SIR:**

Transmitted herewith for filing is: ☒ a new application  
☐ a c-i-p application of S.N. \_\_\_\_\_ filed \_\_\_\_\_

Inventor(s): Shinichiro MATSUO

For RELAY APPARATUS

Enclosed are:

- ☒ 8 sheets of drawings.(Figs. 1-10)  
☒ Specification, including claims and abstract ( 23 pages)  
☒ Declaration  
☒ An assignment of the Invention to FUJITSU LIMITED  
☒ A certified copy of Japanese Application No(s). 2000-090492  
☒ An associate power of attorney  
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27  
☒ Post card  
☒ Recording fee (as indicated below)  
☐ Information Disclosure Statement, PTO-1449, copies of \_\_\_\_ references  
☐ Other \_\_\_\_\_  
☐ Other \_\_\_\_\_

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	15-20 =	0
INDEP CLAIMS	2-3 =	0
[ ] MULTIPLE DEPENDENT CLAIMS PRESENTED		

\*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$355
x 9 =	\$
X 40 =	\$
x 135 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$710
x 18 =	\$
x 80 =	\$
x 270 =	\$
<b>TOTAL</b>	<b>\$710</b>

- ☐ Please charge our Deposit Account No. 08-1634 the amount of \_\_\_\_\_ to cover the filing fee and recording fee (if any)
- ☒ A check in the amount of \$750.00 to cover the filing fee and the recording fee (if any) is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.  
60<sup>th</sup> Floor  
Empire State Building  
New York, New York 10118-6098  
(212)643-5000

Date: 10/26/00

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634.

Respectfully Submitted

- [ ] Aaron B. Karas, Reg. No. 18,923  
[X] Samson Helfgott, Reg. No. 23,072  
[ ] Leonard Cooper, Reg. No. 27, 625  
[ ] Linda S. Chan, Reg. No. 42,400  
[ ] Harris A. Wolin, Reg. No. 39,432  
[ ] Brian S. Myers, Reg. No. 46,947

jc932 U.S. PRO  
09/696807  
10/26/00

Filed by Express Mail  
(Receipt No. 4522859205)  
on 10/24/00  
pursuant to 37 C.F.R. 1.10.  
250-7562

Title of the Invention

Relay apparatus

BACKGROUND OF THE INVENTION

The present invention relates to a relay apparatus for performing mutual conversion between IP (Internet Protocol) packet and ATM cell in a WAN (Wide Area Network) utilizing an ATM (Asynchronous Transfer Mode) technology.

Conventionally, a method has been known in which WAN is configured by connecting a plurality of LANs (Local Area Network) via an ATM network. For example, in an LAN environment, a protocol of TCP (Transmission Control Protocol)/IP is commonly used to transmit or receive the voice data or image data in the form of IP packet. Also, in the ATM network various kinds of data are transmitted or received in a unit of ATM cell. Therefore, a relay apparatus for performing mutual conversion between IP packet and ATM cell is necessary between the LAN and the ATM network. This relay apparatus performs conversion from the IP packet to the ATM cell, or from the ATM cell to the IP packet.

In the LAN environment utilizing the IP packet, the media communication which has strict limitations for the delay, such as the voice or image communication, assures the QoS (Quality of Service) in such a way that the amount of delay is minimized by setting at "1000" the value of a TOS (Type Of Service) field of 4 bits that is a service type included in an IP header placed at a leading part of an IP packet.

In the ATM environment, a service category can be specified for every virtual connection VC (Virtual Connection), and a fixed bandwidth can be secured by setting this service category at a CBR (Constant Bit Rate). Therefore, QoS with less delay time can be assured, irrespective of whether or not there is communication data.

By the way, various kinds of data are transmitted or received using the IP packet in the LAN. In the case where the LAN and the ATM network are connected via a relay apparatus, the IP packet corresponding to media data having strict requirement for real time and the IP packet corresponding to burst data such as FTP (File Transfer Protocol) having less strict requirement for real time are transmitted or received via one IP connection, when an IP connection for transmission or reception of the IP packet and a virtual connection for transmission or reception of the ATM cell are matched. As a result, there was the problem that a suitable service quality cannot be attained to accommodate the virtual connection VC of the ATM network.

For example, in the case where only the IP packets for voice data having severe requirement for real time are transmitted or received on the IP connection, the CBR may be specified as a service category of the virtual connection for ATM. For the FTP data having less severe requirement for real time, a UBR (Unspecified Bit Rate) may be specified as a service category of the virtual connection for ATM. However, in the case where these two kinds of IP packets are mingled on one IP connection, it is impossible to make QoS control for ATM with the service category specified. Therefore, the IP connection and the ATM virtual connection corresponding to these two kinds of IP packets need to be prepared respectively, giving rise to the use of more resources, resulting in the higher operation costs.

#### SUMMARY OF THE INVENTION

The present invention is provided in the light of the above-described respects, and it is an object of the invention to provide a relay apparatus which can secure a suitable service quality.



communication band based on the data length and the communication time interval corresponding to the first packet requiring a high service quality. Since the communication band is set corresponding to the packets requiring high service quality, a necessary and minimal service quality can be assured.

Also in the case where a first packet having strict requirement for real time and a second packet having less strict requirement for real time are mingled in the packets received by the packet receiving unit, it is desirable that the band setting unit sets the communication band based on the data length and the communication time interval corresponding to the first packet. Since the communication band is set corresponding to the packets having strict requirement for real time, a service quality necessary to transmit those packets at minimum can be assured.

The first packet is preferably an IP packet in conformance with the real time transport protocol. This IP packet corresponds to the media data such as voice or images, and is desirably transmitted in shorter delay time. It is possible to realize a high service quality by securing the communication band corresponding to such IP packets.

Preferably, the data length detecting unit detects the data length based on a total length included in an IP header of the IP packet, and the time interval detecting unit detects the communication time interval based on a time stamp included in a real time transport protocol message of the IP packet. Using the total length included in the IP header and the time stamp included in the real time transport protocol message, the data length and the communication time interval corresponding to them can be readily detected.

The relay apparatus of the invention preferably further comprises cell segmentation unit for segmenting the first and second packets received by the packet receiving unit into ATM

cells, ATM output control unit for outputting the ATM cells segmented by the cell segmentation unit to an ATM connection as the channel, and switch control unit for controlling the ATM output control unit to output preferentially the ATM cells corresponding to the first packet, when the ATM cells corresponding to the first and second packets are mingled and input into the ATM output control unit. By transmitting the data of the first packet used to set the communication band prior to the data of the second packet, a higher service quality for the data of the first packet can be assured.

It is preferable that the service category of the ATM connection is set to GFR, and a minimum cell rate corresponding to the ATM connection in the switch control unit is set by the band setting unit. By setting the service category and the traffic parameter in this way, the data corresponding to the first packet can be reliably transmitted, and the data corresponding to the second packet can be transmitted in accordance with an idle condition of the band. Therefore, a suitable service quality can be attained in consideration of the degree of significance of the data.

Also, it is preferable that the service category of the ATM connection is set to VBR, and an average cell rate corresponding to the ATM connection in the switch control unit is set by the band setting unit. By setting the service category and the traffic parameter in this way, the data corresponding to the first packet can be reliably transmitted, and the data corresponding to the second packet can be transmitted in accordance with an idle condition of the band. Therefore, a suitable service quality can be attained in consideration of the degree of significance of the data.

Preferably, the band setting unit repetitively sets the communication band at predetermined timings, after the virtual connection is set as the channel. By repetitively setting

the communication band, it is possible to assure an optimal service quality at all times.

Preferably, the band setting unit sets the communication band, when a constant virtual connection is set as the channel. Since the communication band is set when setting the constant virtual connection, it is possible to relieve the trouble or processing load required to set necessary communication band.

Preferably, the band setting unit sets the communication band, when a switch type virtual connection is set as the channel. Since the communication band is set every time the switch type virtual connection is set, a suitable communication band can be set for every set connection, and the optimal service quality can be assured.

Preferably, the band setting unit sets the communication band when a call set-up is made in accordance with an upper-level layer protocol that is higher than a hierarchy corresponding to the packet, after a virtual connection is set as the channel. Since the suitable communication band can be set after the call set-up is ended and before the data is actually transmitted, the optimal service quality can be assured in the transmission process that subsequently occurs.

The relay apparatus of this invention is used in a network for transmitting the variable length data using a fixed length packet, and performs the operation of allocating a connection of IP packet having a strict requirement for real time, and a connection having less strict requirement for real time to the same connection that uses a service category capable of assuring the minimum rate. Since the communication band of connection for an IP packet having strict requirement for real time is taken into consideration and the minimum rate for the corresponding connection is set, a suitable service quality for this IP packet can be assured.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram of a network in one embodiment of the present invention;

FIG. 2 is a detailed block diagram of a relay apparatus included in the network as shown in FIG. 1;

FIG. 3 is a diagram showing the format of an IP packet;

FIG. 4 is a diagram showing the format of an IP header;

FIG. 5 is a diagram showing the format of an RTP message;

FIG. 6 is a flowchart showing an operation procedure for setting the band of an ATM virtual connection in a relay apparatus;

FIG. 7 is a diagram showing a stored state of a memory within the relay apparatus;

FIG. 8 is an explanatory diagram for a specific calculation method of a minimum cell rate;

FIG. 9 is a table showing the protocol configuration defined with H.323; and

FIG. 10 is a configuration diagram showing an alternate embodiment of the relay apparatus.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

A network including a relay apparatus according to one embodiment of the present invention will be described below with reference to the drawings.

FIG. 1 is a schematic block diagram of the network including the relay apparatus according to one embodiment of the invention. As shown in FIG. 1, the network of this embodiment is configured by an ATM network 100, relay apparatus 200, 210, routers 300, 310, and PCs (personal computers) 400, 410, 420. One LAN 500 is configured to include the PCs 400, 410 and a router 300, this LAN 500 being connected via a relay apparatus 200 to the ATM network 100. Similarly, the other LAN 600 is configured to include a PC 420, and a router 310, this LAN 600 being connected via a relay apparatus 210 to the ATM network 100.



When an IP packet is transmitted from the LAN 500 to other terminal unit (e.g., a PC 420 connected to the LAN 600) connected to the ATM network 100, the relay apparatus 200 accepts the IP packet, converting the input IP packet into the ATM cell to be output to the ATM network 100, as well as converting the ATM cell transferred from the ATM network 100 into the IP packet to be output to the LAN 500. Also, the relay apparatus 200 calculates and sets up the band of virtual connection VC provided between the ATM network 100 and it, based on the communication time interval of the IP packet input from the LAN 500. The other relay apparatus 210 has the same configuration, and is not described in detail here.

In this embodiment, for example, when the PC 400 and the PC 420 intercommunicate in real time by designating an IP address to set up the IP connection, a new data communication such as file transfer which has less strict requirement for real time may occur, if the PC 400 is an FTP server or WWW server. At this time, a lowest cell rate for the virtual connection VC of ATM is automatically set. Also, in the case where the PC 400 and the PC 420 perform voice conversation through VoIP (Voice over IP) communication in real time, the lowest cell rate for the virtual connection VC of ATM is automatically set, even when the video communication having high requirement for real time is started.

FIG. 2 is a diagram showing the detailed configuration of the relay apparatus. The relay apparatus 200 is configured to include a LAN interface (LAN-IF) 10, a LAN controller (LAN-CNTL) 12, a CLAD (Cell Assembly Disassembly) 14, PIF (Port Interface) 22, 30, an ATM switch (ATM-SW) 24, a CPU 32, and a memory 34.

The LAN interface 10 is used to connect physically the relay apparatus 200 to the LAN 500. For example, a cable such as 100 Base-T is connected. The LAN controller 12 controls

the input and output operations of signals via the LAN interface 10.

The CLAD 14 is to perform mutual conversion between IP packet and ATM cell, segmenting an IP packet input via the LAN interface 10 into one or more cells, and reassembling one or more cells input from the ATM network 100 into an IP packet. In order to effect segmentation and assembly, the CLAD 14 comprises an RTP (Real-time Transport Protocol) unit 16, a SAR (Segmentation and Reassembly) unit 18, and an ATU (Address Transfer Unit) 20. The RTP unit 16 analyzes an RTP message included in the input IP packet, extracting the value of a time stamp contained in this message, or creating an RTP message included in the IP packet in producing the IP packet. The segmentation/reassembly unit 18 segments an IP packet into the ATM cells, and reassembles the ATM cells into an IP packet. The address transfer unit 20 performs the transfer between an IP header and a cell header. For example, when the IP packet is segmented into the ATM cells, the cell header is created based on the IP header, or on the contrary, when the ATM cells are reassembled into the IP packet, the IP packet is created based on the cell header. The detailed contents of the IP header and the RTP message included in the IP packet will be described later. The port interfaces 22, 30 accommodate the physical lines of ATM.

The ATM switch 24 switches the transmission destination of ATM cells. This ATM switch 24 comprises an MBUF (Message Buffer) 26, and a SW-CNTL (Switch-Controller) 28. The message buffer 26 stores temporarily the ATM cells input from the CLAD 14 or via the ATM network 100. The switch controller 28 controls the addressing, scheduling and queuing for the ATM cells stored in the message buffer 26. For example, when an IP packet including an RTP message and an IP packet not including RTP message are mingled and input into the relay apparatus 200, the switch controller 28 controls to preferentially

transmit the ATM cells corresponding to the IP packet including the RTP message.

The CPU 32 controls the whole of the relay apparatus 200. Also, the CPU 32 calculates the value of traffic parameter, based on the communication time interval and the data length of the IP packet input from the LAN 500, and sets the band of virtual connection between the ATM switch 24 and the ATM network 100. More specifically, the CPU 32 sets the value of a minimum cell rate mCR that is one of the traffic parameters to secure a necessary band corresponding to the virtual connection VC with the service category set at the GFR (Guaranteed Frame Rate). A specific way of setting the minimum cell rate will be described later. The memory 34 stores an operation program for the CPU 32 and a working area.

The LAN interface 10 and the LAN controller 12 correspond to packet receiving unit; the CPU 32 corresponds to data length detecting unit and time interval detecting unit; the CPU 32 and the memory 34 correspond to band setting unit; the CLAD 14 corresponds to cell segmentation unit; the ATM switch 24 corresponds to ATM output control unit; and the switch controller 28 corresponds to switch control unit.

The network and the relay apparatus 200 in this embodiment have the above configuration. Next, explanation will be given of an operation of securing the band of ATM virtual connection VC, based on an IP packet to be input into the relay apparatus 200.

FIG. 3 is a diagram showing the format of an IP packet. An IP header is included at a leading part of the IP packet, and an RTP message is included at a predetermined location within the IP packet.

FIG. 4 is a diagram showing the format of the IP header. As shown in FIG. 4, the IP header is configured to include "version," "IHL," "service type," "total length," "identifier (ID)," "flag," "fragment offset," "total lifetime (TTL),"

"protocol," "header checksum," "sender address,"  
"destination address," "option," and "padding."

The "version" is a field indicating the version of IP. The "IHL (Internet Header Length)" is a field indicating the length of IP header in a unit of 32 bits. The "service type" is a field indicating the service type of IP being transmitted. The "total length" is a field indicating the length of IP header and the IP data following the IP header in a unit of octet (byte).

The "identifier" is a field containing an identification code for identifying a plurality of IP packets to be restored to the original data on the reception side, when the data is divided into the plurality of IP packets on the transmission side. The value of this identifier is set on the transmission side. The "flag" is a control field for use when the transmission data is divided into a plurality of IP packets. The "fragment offset" is a field indicating the number of divided data at which this IP packet is located.

The "total lifetime (TTL)" is a field indicating the time during which the IP packet can exist within the network. The "protocol" is a field for setting the value of identifying a protocol type at the upper level (layer 4). The "header checksum" is a field for use in error check of the IP header. The "sender address" is a field for setting the IP address of the originator (source). The "destination address" is a field for setting the IP address of destination. The "option" is a field for use in transmitting the information which is not included in the standard IP header. The "padding" is a field for use to set the whole length of option field to a multiple of four octets.

FIG. 5 is a diagram showing the format of an RTP message. As shown in FIG. 5, the RTP message is configured to include "V," "P," "X," "CC," "M," "PT," "sequence number," "time

stamp," "SSRC (synchronous sender) identifier," and "CSRC (contribution sender) identifier."

The "V (Version)" is a field indicating the RTP version. The "P (Padding)" is a field indicating whether or not any extra byte is added to this IP packet. The "X (extension)" is a field indicating an extension bit, in which a predetermined value is set when an extended header is provided after a basic RTP header. The "CC (Csrc Count)" is a contribution sender count, and a field indicating the number of contribution sender identifiers which this message includes.

The "M (Marker)" is a marker bit, and a field usable for the application to mark the boundary of data. The "PT" is a field indicating the PT (Payload Type) of message. The "sequence number" is a field indicating the natural number which is assigned in the order transmission of the IP packet.

The "time stamp" is a field indicating the time when a leading byte of this IP packet has been transmitted. The "synchronous sender identifier" is used to identify the sender of this IP packet by referring to a system having designated a sequence number for this IP packet and a time stamp. The "contribution sender identifier" is used to identify the original sender of this IP packet.

Following the RTP message, the voice or image payload (real time data) is included.

FIG. 6 is a flowchart showing an operation procedure for setting the band of ATM virtual connection VC in the relay apparatus 200 in which the IP packets corresponding to various kinds of service type are input into the relay apparatus 200 from the PC 400 connected to the LAN 500.

The CPU 32 determines whether or not an IP packet has been received at the LAN interface 10 (step S100), and if received, whether or not any RTP message is included in this received IP packet (step S101). If the IP packet is not received (negative determination at step S100), or if the IP

packet has been received but no RTP message is included (negative determination at step S101), the procedure returns to step S100 to repeat determination of whether or not the IP packet has been received.

If the RTP message is included in the received IP packet, an affirmative determination is made at step S101. Then, the CPU 32 extracts the value  $L(m)$  of "total length" included in the IP header (step S102), and stores it in the memory 34 (step S103). The CPU 32 extracts the value  $T(m)$  of "time stamp" included in the RTP message within the IP packet (step S104), and stores it in the memory 34 (step S105).

FIG. 7 is a diagram showing the storage contents of the memory 34. As shown in FIG. 7, the memory 34 has a storage area corresponding to each of the  $i+1$  IP packets numbered from the first ( $m$ -th) IP packet, which is noted for calculation of the band, the "total length" value  $L(m)$  and the "time stamp" value  $T(m)$  for each IP packet being stored in each storage area. The number ( $i+1$ ) of IP packets for storing the "total length" and the "time stamp" is preset. This storing operation is continued until all the values corresponding to the ( $i+1$ ) IP packets are stored in the memory 34.

The CPU 32 determines whether or not the reception up to the  $(m+i)$ -th IP packet has been ended (step S106). If not received, a negative determination is made, and the procedure returns to a determination at step S100 to repeat the processing. If the reception up to the  $(m+i)$ -th IP packet has been ended, an affirmative determination is made at step S106. Then the CPU 32 calculates a minimum cell rate  $mCR$  in accordance with a predetermined expression of calculation, and sets this value to the switch controller 28 within the ATM switch 24 (step S107). Thereafter, a parameter  $i$  which is used to count the number of IP packets is initialized. The procedure returns to step S100 to repeat a series of band setting operations.

FIG. 8 is an explanatory diagram for a specific calculation method of the minimum cell rate mCR. In FIG. 8, it is supposed that the "total length" value for the m-th IP packet is L(m), and the "time stamp" value included in the RTP message is T(m). Similarly, it is supposed that the "total length" value and the "time stamp" value corresponding to the (m+1)-th IP packet are L(m+1) and T(m+1), respectively. Also, it is supposed that the "total length" value and the "time stamp" value corresponding to the (m+2)-th IP packet are L(m+2) and T(m+2), respectively. Further, it is supposed that the "total length" value and the "time stamp" value corresponding to the (m+i)-th IP packet are L(m+i) and T(m+i), respectively.

Taking into consideration the m-th IP packet alone, the amount of received data per unit of time is calculated such as:

$$A = L(m) / (T(m+1) - T(m)) \quad \dots (1)$$

Since the user information of 48 bytes is contained in one cell, the data amount A per unit of time divided by 48 is defined as the value A', which is the number of cells transmitted or received per unit of time, i.e., cell rate.

Taking into consideration the m-th and (m+1)-th IP packets, the amount of received data B per unit of time is calculated such as:

$$B = (L(m) + L(m+1)) / (T(m+2) - T(m)) \quad \dots (2)$$

Accordingly, the number of cells B' transmitted or received per unit of time is equal to the value obtained by dividing the value B by 48.

Similarly, taking into consideration the m-th to (m+i)-th IP packets, the amount of received data P per unit of time is calculated such as:

$$P = (L(m) + L(m+1)) + \dots + L(m+i) / (T(m+i+1) - T(m)) \quad \dots (3)$$

Accordingly, the number of cells P' transmitted or received per unit of time is equal to the value obtained by dividing the value P by 48.

In this way, in the relay apparatus 200 of this embodiment, if an IP packet corresponding to the media data such as voice or images including an RTP message is input from the LAN 500, the minimum cell rate mCR of the virtual connection VC with the service category set at GFR is set so that at least this IP packet can be transmitted. Accordingly, it is possible to secure a minimum of band which can transmit the ATM cells segmented from the IP packet for media data having strict requirements for the service quality and real time. Also, the IP packet having less strict requirement for real time (e.g., IP packet corresponding to the FTP) can be transmitted at a timing depending on the size of the band that has been practically secured.

The present invention is not limited to the above embodiment, but may be modified in various ways within a scope of the invention. For example, in the above embodiment, the minimum cell rate mCR of the virtual connection VC is set every time the (i+1) IP packets including the RTP message are received, as described using a flowchart of FIG. 6. However, the set timing of this minimum cell rate mCR can be varied differently. Alternate embodiments (1) to (3) of the set timing for the minimum cell rate mCR will be described below.

(1) When the minimum cell rate is set after establishment of the PVC (Permanent Virtual Connection)

In the case where the permanent virtual connection PVC is used as the ATM connection, the value of the minimum cell rate mCR calculated once may not fluctuate greatly in some cases. In such a case, after establishment of PVC, the minimum cell rate mCR may be first calculated once, and this calculated value set in the ATM switch 24. Thereby, the processing load of the CPU 32 can be relieved.



(2) When the minimum cell rate is set after establishment of the SVC (Switched Virtual Connection)

In the same way as above, the minimum cell rate may be calculated after establishment of the switched virtual connection SVC. That is, every time the SVC is set, the minimum cell rate mCR may be calculated first only once, and this calculated value set in the STM switch 24. Thereby, the load of the CPU 32 can be relieved as compared with the case where the minimum cell rate mCR is calculated at all times. Since the minimum cell rate mCR is set every time the switched virtual connection SVC is set, the optimal communication band, i. e., service quality can be assured for every set connection.

(3) When the minimum cell rate is set after call setting by the application

FIG. 9 is a diagram showing the protocol configuration as defined in accordance with H.323. This H.323 is a protocol system for voice/image/data communications on the IP network without guarantee of service quality, which was instituted by the ITU (International Telecommunication Union). The details of H.225 signaling are defined in Q.931.

For example, considering a case where the connection is established between a PC 400 and a PC 420, after a request of establishing TCP connection (SYN) is transmitted from the PC 400 to the PC 420, an acknowledgement of establishing TCP connection (ACK) is returned from the PC 420 to the PC 400. Then, a call Setup between these two PC 400 and PC 420 is made in accordance with Q.931. More specifically, after a Setup message is transmitted from the PC 400 to the PC 420, a Connect message is returned from the PC 420 to the PC 400, so that a call Setup can be made.

In this way, after the virtual connection VC of ATM having the GFR set as the service category is set, establishment of TCP connection and a call Setup with Q.931 can be made between the PC 400 and the PC 420. Thereafter, the minimum cell rate

mCR may be calculated only once, and this calculated value set in the ATM switch 24. In practice, the transmission or reception of payload (real time data) of RTP occurs after the negotiation of communication function and the opening procedure of logical channel are executed in accordance with H.245. At this time, if a suitable service quality is provided, there is no trouble in the communication of real time data. As described above, there is the advantage that the load of the CPU 32 can be relieved, like the case where the minimum cell rate mCR is set immediately after establishment of PVC or SVC.

In the above embodiment, the service category of ATM is specified at GFR, and the value of the minimum cell rate mCR which is one of the traffic parameters is calculated and set up. However, the VBR (Variable Bit Rate) may be specified as the service category, and the value of an SCR (Sustainable Cell Rate) that is one of the traffic parameters may be calculated and set up. The specific value of the sustainable cell rate SCR may be directly any value of the minimum cell rate mCR which is calculated using the above expressions (1) to (3). Also, the timing of setting the sustainable cell rate SCR may be set once immediately after establishment of PVC or SVC, or set after a call setup in the application, besides the case where it is repetitively set at all times as shown in FIG. 6.

In the above embodiment, the total value of data for the received IP packets divided by the total value of communication time interval is converted into the number of cells. This calculated result is made coincident with the minimum cell rate mCR (or sustainable cell rate SCR). However, this calculated result may be multiplied by a predetermined value of less than 1, and made coincident with the minimum cell rate mCR or sustainable cell rate SCR. In this case, the ATM cells corresponding to the IP packet including the RTP message may

not be transmitted but discarded in some cases. However, since the data having strict requirement for real time can be transmitted at constant rate and reliably, a constant service quality can be assured at all times.

In the above embodiment, the communication time interval of IP packet is found based on the time stamp included in the RTP message within the received IP packet. However, the communication time interval may be detected by measuring the arrival time interval of IP packet which is practically input into the LAN interface 10. Also, in the above embodiment, paying attention to only the IP packet corresponding to the RTP, the minimum cell rate mCR and the sustainable cell rate SCR are set up. However, the present invention is applicable to the IP packet data having strict requirement for real time or the packet data other than IP.

Also, the CBR (Constant Bit Rate) may be specified as the service category, and the value of PCR (Peak Cell Rate) may be calculated and set up. In this case, it follows that the value of n times the band for assuring the service quality is specified.

In the above embodiment, the relay apparatus 200 comprises the ATM switch 24. However, the relay apparatus 200 may not comprise the ATM switch 24.

FIG. 10 is a configuration diagram showing an alternate embodiment of the relay apparatus. A relay apparatus 200A as shown in FIG. 10 has a configuration where the ATM switch 24 and the port interface 22 included in the relay apparatus 200 as shown in FIG. 2 are replaced with an ATM controller (ATM-CNTL) 124. This ATM controller 124 comprises a message buffer (MBUF) 126, and a message buffer controller (MBUF-CNTL) 128. The message buffer 126 temporarily stores the ATM cell input from the CLAD 14 or the ATM network 100. The message buffer controller 128 controls the scheduling and queuing of ATM cells stored in the message buffer 126. For example, in



## CLAIMS

1. A relay apparatus comprising:
  - packet receiving unit for receiving an input packet;
  - data length detecting unit for detecting the data length of the packet received by the receiving unit;
  - time interval detecting unit for detecting the communication time interval of the packet received by said packet receiving unit; and
  - band setting unit for setting the communication band of a channel for sending out the packet received by said packet receiving unit, based on the data length detected by said data length detecting unit and the communication time interval detected by said time interval detecting unit.
2. The relay apparatus according to claim 1, wherein said band setting unit calculates said communication band by dividing the total value of said data lengths for a predetermined number of packets by the total value of said communication time intervals for them.
3. The relay apparatus according to claim 1, wherein said band setting unit calculates the communication band by multiplying the total value of the data lengths for the predetermined number of packets divided by the total value of communication time intervals for them by a predetermined value of less than 1.
4. The relay apparatus according to claim 1, wherein a first packet and a second packet corresponding to high and low service qualities respectively are mingled in the packets received by said packet receiving unit, and said band setting unit sets the communication band based on the data length and the communication time interval corresponding to the first packet requiring a high service quality.
5. The relay apparatus according to claim 1, wherein a first packet having strict requirement for real time and a second packet having less strict requirement for real time are mingled

in the packets received by said packet receiving unit, and said band setting unit sets the communication band based on the data length and the communication time interval corresponding to the first packet.

6. The relay apparatus according to claim 4, wherein the first packet is an IP packet conforming with the real time transport protocol.

7. The relay apparatus according to claim 6, wherein said data length detecting unit detects the data length based on the total length contained in an IP header of the IP packet, and said time interval detecting unit detects the communication time interval based on a time stamp contained in a real time transport protocol message of the IP packet.

8. The relay apparatus according to claim 4, further comprising cell segmentation unit for segmenting the first and second packets received by said packet receiving unit into the ATM cells,

ATM output control unit for outputting the ATM cells segmented by said cell segmentation unit to an ATM connection as the channel, and

switch control unit for controlling said ATM output control unit to output preferentially the ATM cells corresponding to the first packet, when the ATM cells corresponding to the first and second packets are mingled and input into said ATM output control unit.

9. The relay apparatus according to claim 8, wherein said ATM connection has a service category set in GFR, and said switch control unit has a minimum cell rate corresponding to the ATM connection set by said band setting unit.

10. The relay apparatus according to claim 8, wherein said ATM connection has a service category set in VBR, and said switch control unit sets an average cell rate corresponding to the ATM connection by said band setting unit.

11. The relay apparatus according to claim 8, wherein said band setting unit repetitively sets the communication band at predetermined timings, after the virtual connection is set as the channel.

12. The relay apparatus according to claim 8, wherein said band setting unit sets the communication band, when a permanent virtual connection is set as the channel.

13. The relay apparatus according to claim 8, wherein said band setting unit sets the communication band, when a switch type virtual connection is set as the channel.

14. The relay apparatus according to claim 8, wherein said band setting unit sets the communication band when a call setup is made in accordance with an upper-level layer protocol that is higher than a hierarchy corresponding to the packet, after the virtual connection is set as the channel.

15. A relay apparatus for use in a network for transmitting variable length data using a fixed length packet, wherein the connection of IP packet having a strict requirement for real time, and the connection having less strict requirement for real time are allocated to the same connection using a service category capable of assuring the minimum rate.

# ABSTRACT

There is disclosed the relay apparatus which can detect the data length and the communication time interval of the received packet, and based on these results of detection, set the communication band of a channel for sending out this received packet.

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
222



FIG. 1

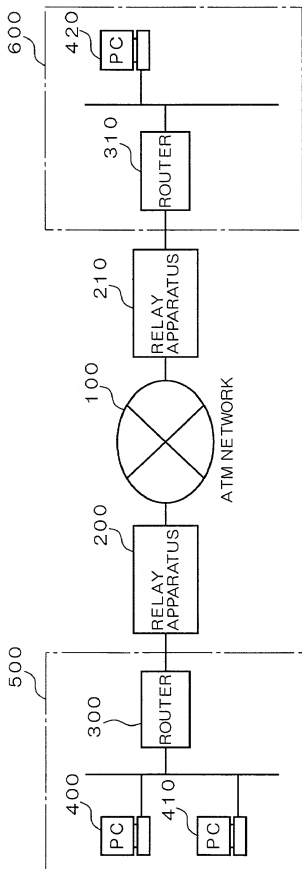


FIG. 2

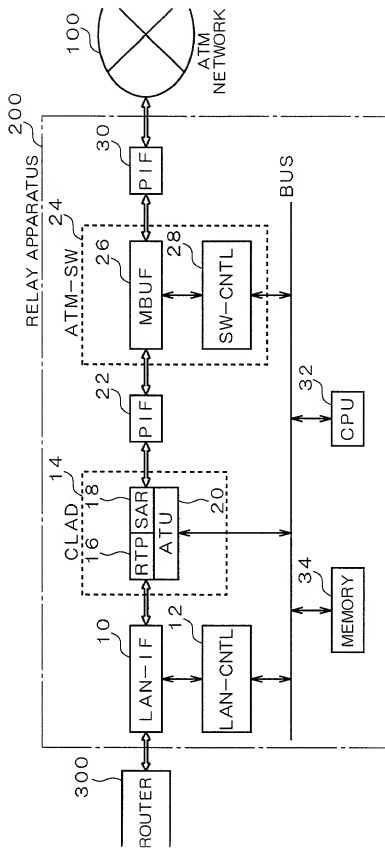


FIG. 3

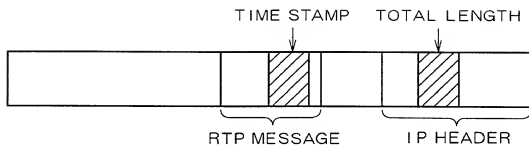


FIG. 4

0			1			2			3		
0	1	2	3	4	5	6	7	8	9	0	1
VERSION			IHL		SERVICE TYPE			TOTAL LENGTH			
IDENTIFIER (ID)							FLAG	FLAGMENT OFFSET			
TOTAL LIFE TIME (TTL)			PROTOCOL			HEADER CHECKSUM					
SENDER ADDRESS											
DESTINATION ADDRESS											
OPTION									PADDING		
DATA											

FIG. 5

0										1										2										3											
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
V		PX		CC				M	PT				SEQUENCE NUMBER																												
TIME STAMP																																									
SYNCHRONOUS SENDER (SSRC) IDENTIFIER																																									
CONTRIBUTION SENDER (CSRC) IDENTIFIER (0 TO 15 ITEMS, 32 BITS PER EACH ITEM)																																									
PAYLOAD (REAL TIME DATA)																																									

FIG. 6


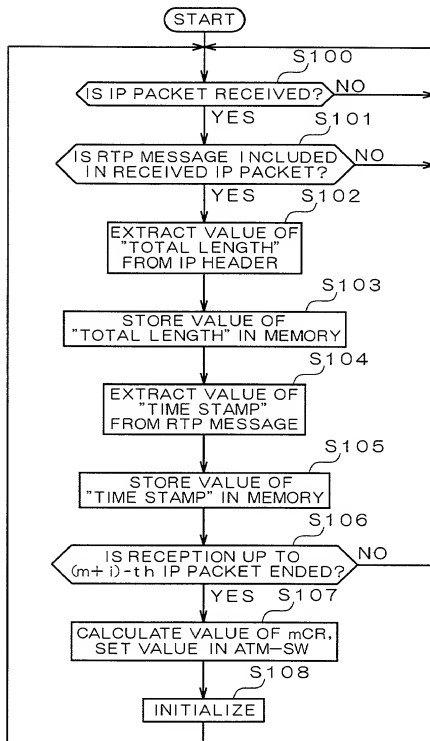


FIG. 7




## FIG. 8

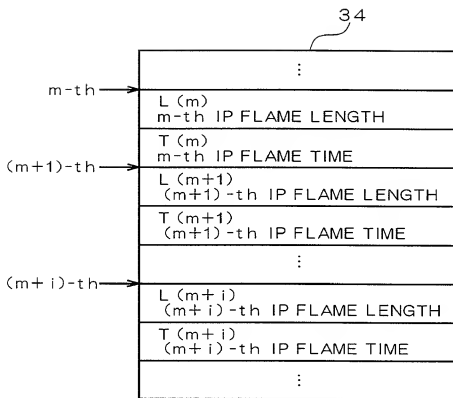

## F/G. 9

AUDIO VISUAL APPLICATION		CONTROL OF TERMINAL AND ADMINISTRATION			DATA APPLICATION
VOICE G.711 G.722 G.723.1 G.728	IMAGE H.261	H.225.0 SIGNAL BETWEEN TERMINAL AND GATEKEEPER (RAS)	H.225.0 CALL CONTROLLING SIGNAL (G.931)	H.245.0 CONTROLLING SIGNAL BETWEEN TERMINAL AND TERMINAL	T.124 T.125
H.225.0 (RTP)		H.225.0 (RTCP)			
UNRELIABLE TRANSPORT (e. g. UDP)		RELIABLE TRANSPORT (e. g. TCP)			
		NETWORK LAYER (e. g. IP)			
		DATA LINK LAYER			T.123
		PHYSICAL LAYER			

FIG. 10

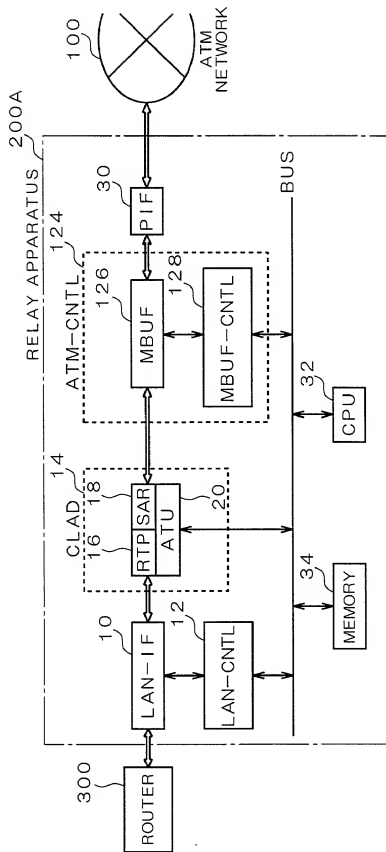



## Declaration and Power of Attorney for Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明について、特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私は、最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

## RELAY APPARATUS

上記発明の明細書はここに添付されているが、下記の欄がチェックされている場合は、この限りでない：

the specification of which is attached hereto unless the following box is checked:

- ☐ \_\_\_\_\_ の日に出版され、  
この出版の米国出版番号または PCT 国際出版番号は、  
\_\_\_\_\_ であり、且つ  
\_\_\_\_\_ の日に修正された出版（該当する場合）

- ☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、上記の修正書によって修正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解しているときここに表明する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、基幹規則第 37 編規則 1.56 に定義されている、特許法について重要な情報を開示する義務があることを認める。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

**Burden Hour Statement:** This form is estimated to take 0.4 hours to complete. Time will vary depending upon the need of the individual case. Any comments on the amount of time you are required to complete this form should be sent to Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# Japanese Language Declaration (日本語宣言書)

私は、ここに、以下に記載した外国での特許出願または発明者証の出願、或いは米国以外の少なくとも一國を指定している米国特許第35条第365条(a)によるPCT国際出願について、同第119条(a)-(4)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(4) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application for which priority is claimed.

## Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

2000-090492

Japan

29/03/2000

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願日/月/年)

☐

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願日/月/年)

☐

私は、ここに、下記のいかなる米国仮特許出願についても、その米国特許第35条第119条(a)項の利益を主張する。

I hereby claim the benefit under Title 35, United States Code, Section 119(a) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、ここに、下記のいかなる米国仮出願についても、その米国特許第35条第120条に基づき利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(a)に基づき利益を主張する。また、本出願の発明者証の国籍の主張が、米国特許第35条第112条第1項に規定された範囲で、先行する米国出願又はPCT国際出願に開示されていない場合においては、その先行出願の出願日と本出願の出願日またはPCT国際出願日との間の期間中に入手された形で、違背規則第37条規則1.56に定義された特許性に関わる重要な情報について開示範囲があることを承認する。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(状況: 特許許可、係属中、放棄)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(状況: 特許許可、係属中、放棄)

私は、ここに表明された私自身の知識に依る陳述が真実であり、且つ信憑性を保つことに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国特許第18条第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのような虚偽に又は虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に問題が生ずることを理解した上で陳述が行われたことを、ここに宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration  
(日本語宣言書)

我々は、私は本出願を審査する手続を行い、且つ米国特許審判庁との全ての業務を遂行するために、記名された発明者として、下記の弁護士及び/または弁理士を任命する。(氏名及び電話番号を記載すること)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).  
Samson Helfgott, Reg. No. 25,002; Aaron B. Karas, Reg. No. 18,923; Leonard Cooper, Reg. No. 27,625 and Linda S. Chan, Reg. No. 42,900.

Send Correspondence to:

HELFGOTT & KARAS, P.C.  
Empire State Building, 60th Floor  
New York, New York 10118-0110

直接電話連絡先: (氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

HELFGOTT & KARAS  
(212) 643-5000

第一または第一発明者氏名

Full name of sole or first inventor

Shinichiro Matsuo

発明者の署名

日付

Inventor's signature

Date

Shinichiro Matsuo

October 21, 2000

住所

Residence

Kawasaki, Japan

国籍

Citizenship

Japan

郵便の元先

Post Office Address

c/o FUJITSU LIMITED,  
1-1, Kamikodanaka 4-chome,  
Nakahara-ku, Kawasaki-shi,  
Kanagawa 211-8588 Japan

第二共同発明者がいる場合、その氏名

Full name of second joint inventor, if any

第二共同発明者の署名

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

郵便の元先

Post Office Address

(第三以下の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

**THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re the Application of: **Shinichiro MATSUO**

Filed : **Concurrently herewith**

For : **RELAY APPARATUS**

Serial No. : **Concurrently herewith**

October 26, 2000


Assistant Commissioner of Patents  
Washington, D.C. 20231

**SUB-POWER OF ATTORNEY**

S I R:

I, Samson Helfgott Reg. No. 23,072 attorney of record  
herein, do hereby grant a sub-power of attorney to Harris A.  
Wolin, Reg. No. 39,432 and Brian S. Myers, Reg. No. 46,947 to  
act and sign in my behalf in the above-referenced application.

Respectfully submitted,

  
Samson Helfgott  
Reg. No 23,072

HELFGOTT & KARAS, P.C.  
60th FLOOR  
EMPIRE STATE BUILDING  
NEW YORK, NY 10118  
DOCKET NO.:FUJG17.913  
LHH:power

Filed Via Express Mail  
Rec. No.: EL522395082US  
On: October 26, 2000  
By: Lydia Gonzalez  
Any fee due as a result of this paper,  
not covered by an enclosed check may  
be charged on Deposit Acct. No. 08-  
1634.